


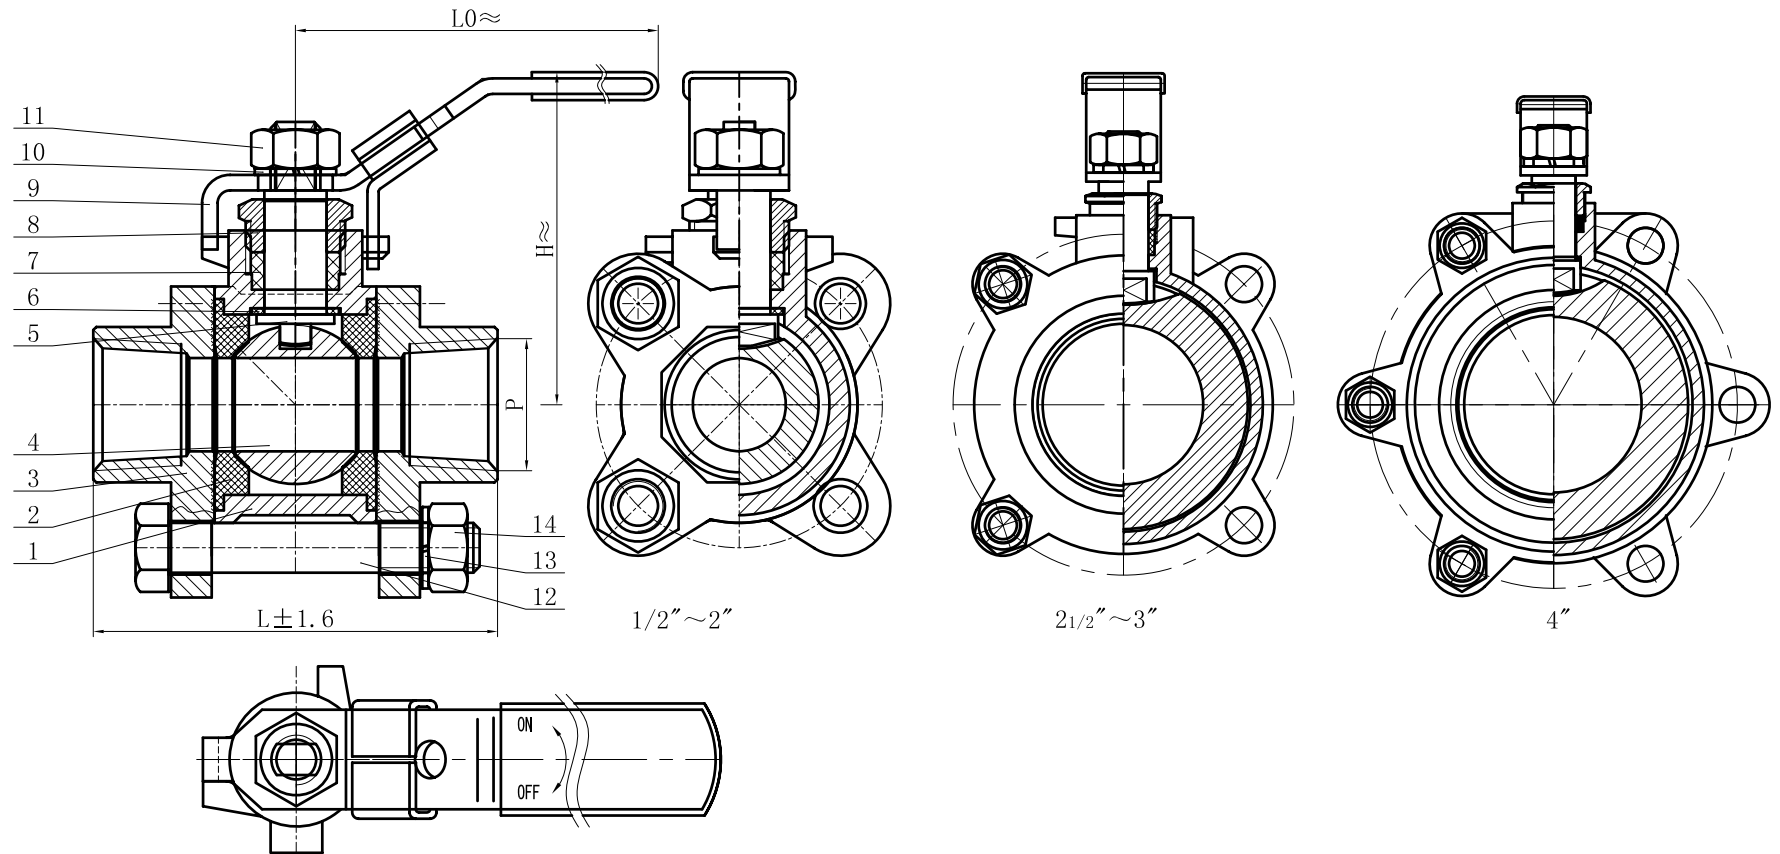

NPS	d	L	L0	H
1/4	11	67	98	52
3/8	12	67	98	52
1/2	15	62	98	56
3/4	20	72	110	61
1	25	80	133	70
1 1/4	32	96	133	80
1 1/2	38	104	170	90
2	49	123	170	90
2 1/2	65	163	220	126
3	78	191	245	132
4	100	242	325	168

The technical requirements

- 1、Design and manufacture according to manufacturer's standard;
- 2、End thread connections: P(BSPT/NPT) - according to the requirements of the order processing;
- 3、End to end according to manufacturer standards;
- 4、Sealing test (gas) : 0.6 ~ 0.8 MPa.

14	Nut	A2-70	7	Packing	PTFE
13	Washer	A2-70	6	Gasket	PTFE
12	Bolt	A2-70	5	Stem	316
11	Nut	A2-70	4	Ball	316
10	Washer	A2-70	3	End cap	316
9	Handle	SS	2	Seat	PTFE
8	Gland	A2-70	1	Body	316
NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL
Sample					
BALL VALVE(3PC-A)					
Q11F-1000PSI-00					
MARK	QTY	FILE NO.	SIGN	DATE	
DESIGN		DATE		PATTERN MARKER	EDITION
CHECK		DATE			SCALE
AUDIT		DATE		01	1:1
APPROVE		DATE		SHEET	

CHECKED BY	
OLD DRAWING NO.	
BASED DRAWING NO.	
SIGN	
DATE	