


Standards:
 1 Design and manufacture: ASME B16.34
 2 Face to Face dimension: ASME B16.10
 3 Threaded connection: ASME B16.11
 4 Pressure temperature ratings: ASTM B16.34
 5 Pressure test: API 598

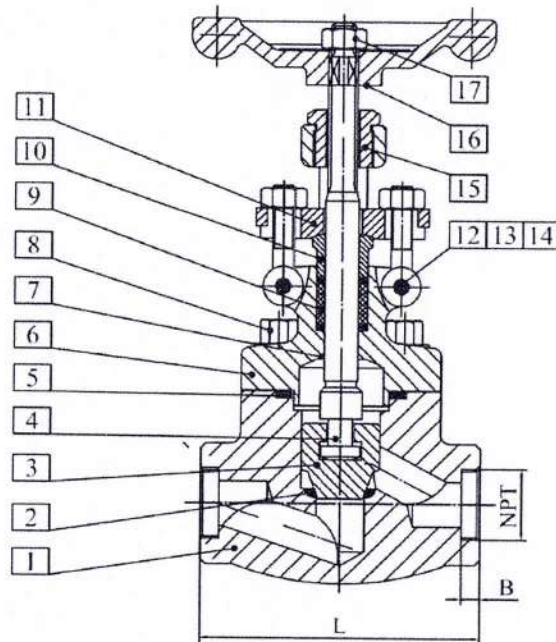

NPT	d	L	B
1/2"	φ 15	79	10
3/4"	φ 20	92	13
1"	φ 25	114	13
1 1/4"	φ 40	152	13
2"	φ 50	172	16

Performance Specification

Nominal Pressure	800LB	Test Medium
Shell Test	(15.0MPa)	Water
Seal Test	(11.0MPa)	
Back Seal Test	(11.0MPa)	
Air Seal Test	80Lb(0.6MPa)	Air
Suitable Temperature	-29~425℃	
Suitable Media	Water/Steam/Oil	

24		
23		
22		
21		
20		
19		
18		
17	H.W.Lock nut	C.S
16	Handwheel	KTH330-08
15	Stem nut	ZcuA110Fe3
14	Gland Nut	ASTM A194-2H
13	Gland bolt	ASTM A193-B7
12	Pin	ASTM A276-410
11	Gland	WCB
10	Bushing	A276 420
9	PacKing	Graphite
8	Bolt	ASTM A193-B7
7	Backseat	+13Cr
6	Bonnet	A105
5	GasKet	304S.S+Graphite
4	Stem	A182 F6a
3	Disc	A105+STL
2	Seat ring	+STL
1	Body	A105
No	Parts	Material

Client:		
Contract :		
NPS: 1/2-2(in)	Product name:	Class: 800LB
Quantity:	(Globe valve)	Type:J11H
Weight:	Designer:	Drawing
	Date:	