


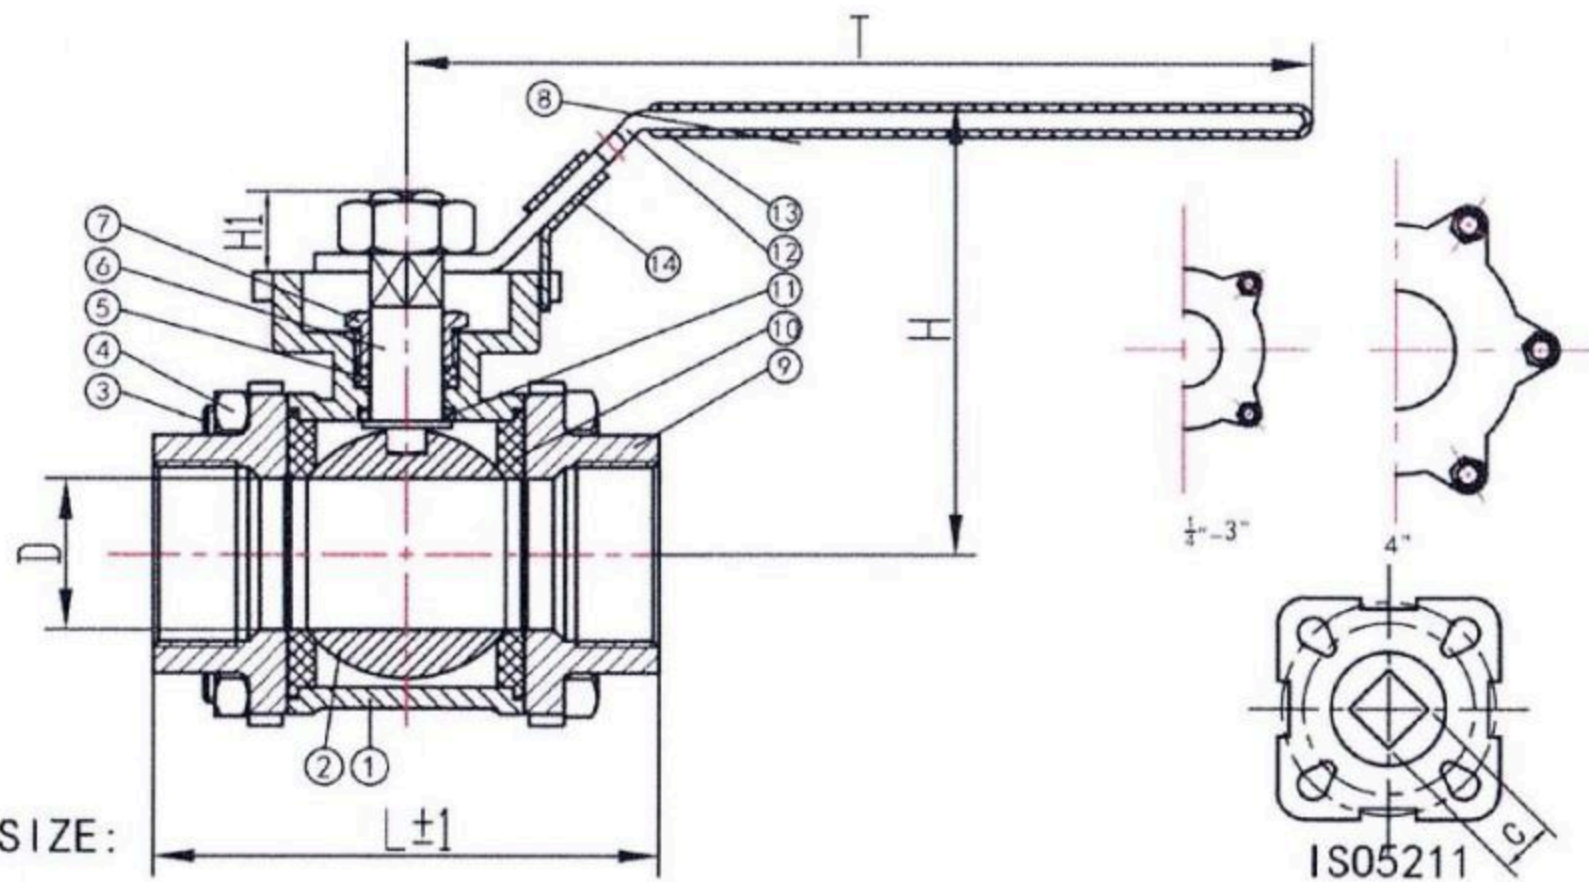

MAIN SIZE:

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DN	15	20	25	32	40	50	65	80	100
D	15	20	25	32	38	50	65	80	100
L	64	72	79	98	111	127	185	205	240
H	75	80	96	78	108	122	153	173	197
H1	12.3	12.3	13.3	15.2	19	19	22	22	24
C	9	9	11	11	14	14	17	17	17
T	126	126	167	158	191	191	294	294	310
扭力(NM)	3.5	6	6	7.5	18	28	32	38	80
ISO5211	F03	F04/F05	F04/F05	F04/F05	F05/F07	F05/F07	F07/F10	F07/F10	F07/F10
WEIGHT (Kg)	0.625	0.715	1.109	1.5	2.11	2.675	6.11	8.24	13.615

DESIGN STANDARD: ASMEB16.34

TEST&INSPECTION: API598

THREADED ENDS: NPT

PRODUCT STYLE: Q11F-1000WOG

MOUNTING PAD: ISO 5211

WORKING PRESSURE: 9.5Mpa

TEMPERATURE RANGE: -20℃~180℃

MATERIAL: ASTM-A351-CF8M, ASTM-A351-CF8, ASTM-A216-WCB

MAIN PARTS MATERIALS:

NO.	PART NAME	MATERIAL	QTY
1	BODY	CF8M	1
2	BALL	SS316	1
3	BOLT	SS201	4(6)
4	NUT	SS201	4(12)
5	PACKING	PTFE	1
6	STEM	SS316	1
7	GLAND	SS201	1
8	NUT	SS201	1
9	CAP	CF8M	2
10	SEAT	RTFE	2
11	THRUST WASHER	PTFE	1
12	HANDLE	SS201	1
13	HANDLE COVER	PVC	1
14	LOCK	SS201	1

3PC NPT Ball Valve

Sample Drawing Mark	Weight	Proportion
		1:1
Total:	Pages	Page: