




FRPP、PVDF、CPVC、UPVC、PP-H 蜗轮式蝶阀

Worm-gear Type Butterfly Valve

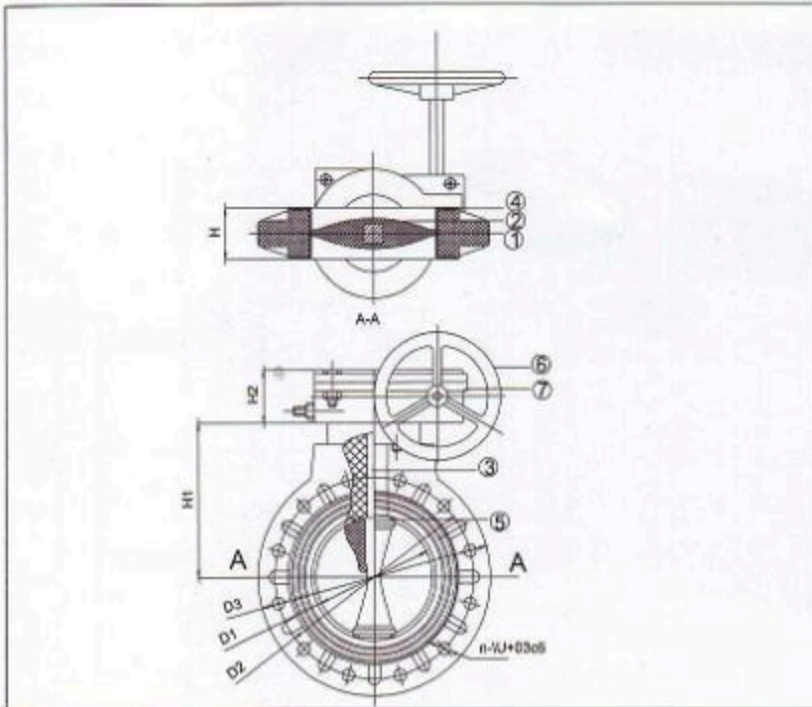

FRPP蜗轮式蝶阀零件配置表

Worm-gear Type Butterfly Valve parts configuration table

NO	名称Name	材 质 Material
1	阀体Body	FRPP
2	阀瓣Disc	FRPP
3	阀杆Stem	45#
4	阀座Valve Seat	EPDM
5	O型圈O-ring	EPDM
6	手轮Handwheel	钢、铸铁steel、Cast Iron
7	螺母nut	FRPP
8	蜗轮箱 Worm gear box	钢、铸铁steel、Cast Iron

第4、5项如用FPM或其它材质橡胶为特殊配置.

主要外形连接尺寸、工作压力和重量表

Main Appearance Connection Dimension, Working Pressure and Weight Table

DN	D1	D2				D3	L1	H	H1	H2	N-φ	工作压力 (Mpa)	重量≈Kg/台
		HG	JIS	DIN	ANSI								FRPP
125	131	210	210	210	216	250	300	32	163	93	8-18	0.5	4.8
150	153	240	240	240	240	285	300	37	176	93	8-22	0.5	5.5
200	204	295	290	295	298	340	180	85	210	93	12-22	0.4	19
250	255	350	355	350	362	395	180	105	240	93	12-22	0.3	28
300	307	400	400	400	432	445	180	120	270	93	12-22	0.3	34
350	358	460	445	460	476	505	180	130	300	93	16-22	0.3	52
400	389	515	510	515	540	580	240	140	350	108	16-22	0.3	78
450	446	565	565	565	578	615	240	152	370	108	20-26	0.2	76
500	494	620	620	620	635	670	260	155	400	108	20-26	0.2	84
600	590	725	730	725	750	780	260	160	460	108	20-30	0.2	105
700	670	840	840	840		928	402	210	590	120	20-33	0.2	
800	770	950	950	950		1034	402	240	620	120	24-33	0.2	
900	870	1050	1050	1050	1085	1168	402	240	705	120	24-33	0.2	
1000	970	1160	1160	1160		1262	560	300	750	120	24-33	0.2	

*蜗轮蝶阀制造执行标准Q/BLSJ008-2008

*压力试验按GB/T13927-1992

*试验压力与工作压力在23℃±2℃时数值

*使用温度-14℃~90℃