


VALVULA MARIPOSA, FIERRO FUNDIDO 150 PSI TIPO WAFER



CUERPO	Fierro Fundido ASTM A126
VASTAGO	Acero Inoxidable 316
DISCO	Acero Inoxidable CF8M (316)
ASIENTO	EPDM
OPERACIÓN	Palanca 2" a 6", Volante de 8" y mayores
EXTREMOS	WAFER
PROCEDENCIA	CHINA

NPS	ACCION	A	B	C	D	E	F	H	J	K	L	T
2"	Palanca	85	162	32	12,7	121	19	65	50	7	42	32
2.1/2"	Palanca	98	174	32	12,7	140	19	65	50	7	45	47
3"	Palanca	104	181	32	12,7	152	19	65	50	7	45	65
4"	Palanca	123	200	32	15,9	191	19	90	70	9,5	52	90
5"	Palanca	136	213	32	19,1	216	22	90	70	9,5	54	111
6"	Palanca	148	225	32	19,1	241	22	90	70	9,5	56	145
8"	Palanca	186	260	38	22,2	299	22	125	102	11,5	60	193
4"	Volante	123	200	32	15,9	191	19	90	70	9,5	52	90
6"	Volante	148	225	32	19,1	241	22	90	70	9,5	56	145
8"	Volante	186	260	38	22,2	299	22	125	102	11,5	60	193
10"	Volante	212	292	38	28,6	362	25	125	102	11,5	66	241
12"	Volante	251	337	38	31,8	431,8	25	125	102	11,5	77	292
14"	Volante	277	368	45	31,8	476,3	29	125	102	11,5	77	325
16"	Volante	308	400	51	33,3	539,8	29	210	165	22	86	380
18"	Volante	342	422	51	38,1	577,9	32	210	165	22	105	428
20"	Volante	374	479	64	41,3	635	32	210	165	22	130	474
24"	Volante	459	562	70	50,8	749,3	35	210	165	22	152	575

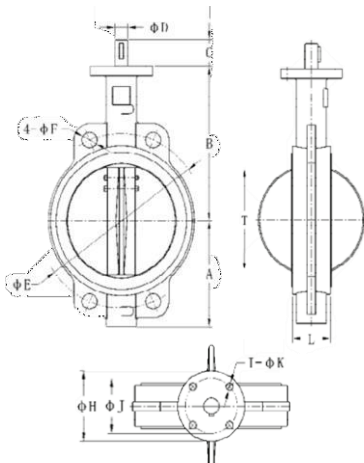